

# LM185/LM285/LM385 Adjustable Micropower Voltage References

### **General Description**

The LM185/LM285/LM385 are micropower 3-terminal adjustable band-gap voltage reference diodes. Operating from 1.24 to 5.3V and over a  $10\mu A$  to 20mA current range, they feature exceptionally low dynamic impedance and good temperature stability. On-chip trimming is used to provide tight voltage tolerance. Since the LM185 band-gap reference uses only transistors and resistors, low noise and good long-term stability result.

Careful design of the LM185 has made the device tolerant of capacitive loading, making it easy to use in almost any reference application. The wide dynamic operating range allows its use with widely varying supplies with excellent regulation.

The extremely low power drain of the LM185 makes it useful for micropower circuitry. This voltage reference can be used to make portable meters, regulators or general purpose

analog circuitry with battery life approaching shelf life. Further, the wide operating current allows it to replace older references with a tighter tolerance part.

The LM185 is rated for operation over a -55°C to 125°C temperature range, while the LM285 is rated -40°C to 85°C and the LM385 0°C to 70°C. The LM185 is available in a hermetic TO-46 package and a leadless chip carrier package, while the LM285/LM385 are available in a low-cost TO-92 molded package, as well as S.O.

#### **Features**

- Adjustable from 1.24V to 5.30V
- Operating current of 10µA to 20mA
- 1% and 2% initial tolerance
- $1\Omega$  dynamic impedance
- Low temperature coefficient

### **Connection Diagrams**

TO-92 Plastic Package




**Bottom View** 

TO-46 Metal Can Package




**Bottom View** 

#### **SOIC Package**



20-Leadless Chip Carrier




Top View


# **Ordering Information**

Package	Temperature Range							
	−55°C to 125°C	–40°C to 85°C	0°C to 70°C	Drawing				
	LM185BH							
TO-46	LM185BH/883			Поон				
10-46	LM185BYH			H03H				
	LM185BYH/883							
		LM285BXZ	LM385BXZ					
TO-92		LM285BYZ	LM385BYZ	Z03A				
10-92		LM285Z	LM385BZ	Z03A				
			LM385Z					
8-Pin SOIC		LM285M	LM385M	MOGA				
		LM285BYM	LM385BM	M08A				
20-Leadless Chip Carrier	LM185BE/883			E20A				


# **Block Diagram**



## **Typical Applications**



#### 5.0V Reference



$$V_{OUT} = 1.24 \left(\frac{R3}{R2} + 1\right)$$

### **Absolute Maximum Ratings** (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/ Distributors for availability and specifications.

(Note 2)

Reverse Current 30mA Forward Current 10mA

Operating Temperature Range (Note 3)

 LM185 Series
 −55°C to 125°C

 LM285 Series
 −40°C to 85°C

 LM385 Series
 0°C to 70°C

Storage Temperature  $-55\,^{\circ}\text{C}$  to  $150\,^{\circ}\text{C}$ 

Soldering Information

TO-92 Package (10 sec.) 260°C TO-46 Package (10 sec.) 300°C

SO Package

Vapor Phase (60 sec.) 215°C Infrared (15 sec.) 220°C

See An-450 "Surface Mounting Methods and Their Effect on Product Reliability" for other methods of soldering surface mount devices.

### **Electrical Characteristics** (Note 4)

		LM185, LM285				LM385						
Parameter	Conditions	Тур	LM185BX, LM185BY LM185B, LM285BX, LM285BY		LM285		Тур	LM385BX,		LM385		Units (Limit)
				Design	Tested Design		קעי	Tested Design		Tested Design		٦, ,
			Limit	Limit	Limit	Limit		Limit	Limit	Limit	Limit	
			(Note	(Note	(Note	(Note		(Note	(Note	(Note	(Note	
			5)	6)	5)	6)		5)	6)	5)	6)	
Reference Voltage	I <sub>R</sub> = 100μA	1.240	1.252	,	1.265	1.270	1.240	1.252	1.255	1.265	1.270	V
			1.255									(max)
			1.228		1.215	1.205		1.228	1.215	1.215	1.205	V
			1.215									(min)
Reference	I <sub>MIN</sub> < I <sub>R</sub> < 1mA	0.2	1	1.5	1	1.5	0.2	1	1.5	1	1.5	mV
Voltage												
Change with Current	1mA < I <sub>R</sub> < 20mA	4	10	20	10	20	5	15	25	15	25	(max)
Dynamic Output	$I_R = 100 \mu A, f = 100 Hz$											
Impedance	$I_{AC} = 0.1 I_{R}  V_{OUT} = V_{REF}$	0.3					0.4					Ω
	V <sub>OUT</sub> = 5.3V	0.7					1					
Reference	I <sub>R</sub> = 100μA											mV
Voltage												''''
Change with		1	3	6	3	6	2	5	10	5	10	(max)
Output												(max)
Voltage												
Feedback		13	20	25	20	25	16	30	35	30	35	nA .
Current	., .,											(max)
Minimum	$V_{OUT} = V_{REF}$	6	9	10	9	10	7	11	13	11	13	μA
Operating	V 5.0V	20	45		45	F0	0.5		60		-	(22.234)
Current (see curve)	V <sub>OUT</sub> = 5.3V	30	45	50	45	50	35	55	60	55	60	(max)
Output Wideband	$I_R = 100\mu A$ , $10Hz < f < 10kHz$											
Noise	V <sub>OUT</sub> = V <sub>REF</sub>	50					50					$\mu V_{rms}$
	V <sub>OUT</sub> = 5.3V	170					170					

### Electrical Characteristics (Note 4) (Continued)

		LM185, LM285										
	Conditions		LM185BX, LM185BY LM185B, LM285BX, LM285BY		LM285		Тур	LM385BX,		LM385		Units (Limit)
Parameter								LM385BY				
		Тур										
			Tested	Design	Tested	Design		Tested	Design	Tested	Design	
			Limit	Limit	Limit	Limit		Limit	Limit	Limit	Limit	
			(Note	(Note	(Note	(Note		(Note	(Note	(Note	(Note	
			5)	6)	5)	6)		5)	6)	5)	6)	
Average	$I_R = 100\mu A$ X Suffix		30					30				ppm/°c
Temperature												
Coefficient	Y Suffix		50					50				(max)
(Note 7)												
	All Others			150		150			150		150	
Long Term	$I_R = 100 \mu A, T = 1000$	20					20					ppm
Stability	Hr,											
	$T_A = 25^{\circ}C \pm 0.1^{\circ}C$											

**Note 1:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but do not guarantee specific performance limits. For guaranteed specifications and test conditions, see the Electrical Characteristics. The guaranteed specifications apply only for the test conditions listed.

Note 2: Refer to RETS185H for military specifications.

Note 3: For elevated temperature operation,  $T_J max$  is:

LM185 150°C LM285 125°C LM385 100°C

Thermal Resistance	TO-92	TO-46	SO-8		
$\theta_{JA}$ (Junction to Ambient)	180°C/W (0.4" leads)	440°C/W	165°C/W		
	170°C/W (0.125" leads)				
θ <sub>JC</sub> (Junction to Case)	N/A	80°C/W	N/A		

Note 4: Parameters identified with boldface type apply at temperature extremes. All other numbers apply at  $T_A = T_J = 25^{\circ}C$ . Unless otherwise specified, all parameters apply for  $V_{REF} < V_{OUT} < 5.3V$ .


Note 5: Guaranteed and 100% production tested.

Note 6: Guaranteed, but not 100% production tested. These limits are not to be used to calculate average outgoing quality levels.

Note 7: The average temperature coefficient is defined as the maximum deviation of reference voltage at all measured temperatures from  $T_{MIN}$  to  $T_{MAX}$ , divided by  $T_{MAX} - T_{MIN}$ . The measured temperatures are -55, -40, 0, 25, 70, 85, 125°C.


### **Typical Performance Characteristics**


# Temperature Drift of 3 Representative Units




00525016

#### **Minimum Operating Current**






**Feedback Current** 




00525017

#### **Reverse Characteristics**



00525019


#### **Forward Characteristics**




00525021

### Typical Performance Characteristics (Continued)

#### **Output Noise Voltage**




#### **Dynamic Output Impedance**




00525023






00525024


#### Temperature Coefficient Typical LM185 LM285 LM385

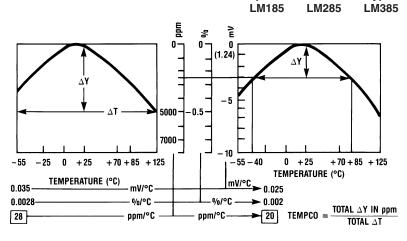




### **Typical Applications**


#### **Precision 10V Reference**



#### 25V Low Current Shunt Regulator




#### Low AC Noise Reference




0052502

#### 200 mA Shunt Regulator




### Typical Applications (Continued)


#### Series-Shunt 20 mA Regulator




#### **High Efficiency Low Power Regulator**




**Voltage Level Detector** 




**Voltage Level Detector** 



Fast Positive Clamp




Bidirectional Clamp ±2.4V



00525034


### Typical Applications (Continued)

# Bidirectional Adjustable Clamp ±1.8V to ±2.4V




00525035

# Bidirectional Adjustable Clamp ±2.4V to ±6V




00525036

#### **Simple Floating Current Detector**

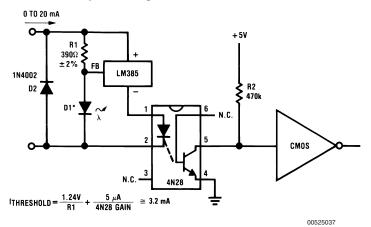


Current Source



00525038

### Typical Applications (Continued)


#### **Precision Floating Current Detector**

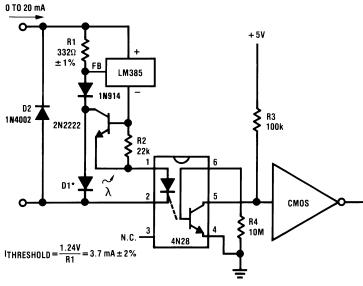


00525039


\*D1 can be any LED, V<sub>F</sub>=1.5V to 2.2V at 3 mA. D1 may act as an indicator. D1 will be on if I<sub>THRESHOLD</sub> falls below the threshold current, except with I=O.

#### Centigrade Thermometer, 10mV/°C






## **Schematic Diagram**

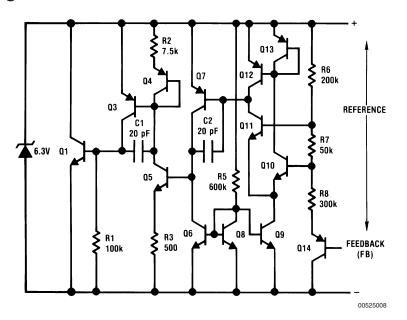


### Physical Dimensions inches (millimeters)

unless otherwise noted

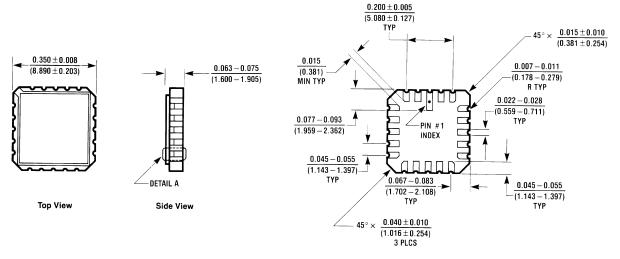


**Bottom View** 




E20A (REV D)


#### 20-Leadless Chip Carrier (E) NS Package Number E20A




TO-46 Metal Can Package (H) NS Package Number H03H

### Physical Dimensions inches (millimeters) unless otherwise noted (Continued)



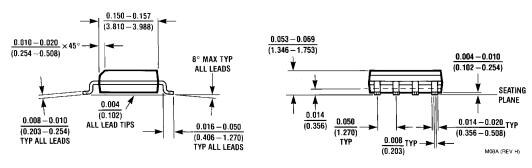

SO Package (M)
NS Package Number M08A

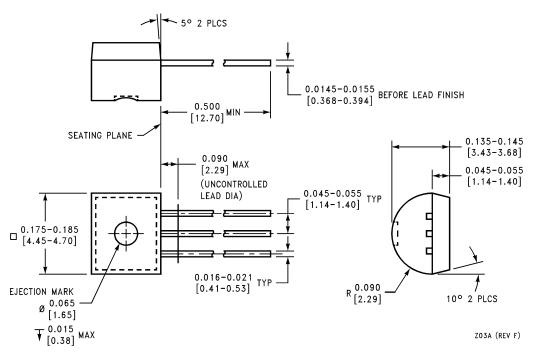

TO-92 Plastic Package (Z) NS Package Number Z03A

#### **Notes**

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

For the most current product information visit us at www.national.com.

#### LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### **BANNED SUBSTANCE COMPLIANCE**

National Semiconductor certifies that the products and packing materials meet the provisions of the Customer Products Stewardship Specification (CSP-9-111C2) and the Banned Substances and Materials of Interest Specification (CSP-9-111S2) and contain no "Banned Substances" as defined in CSP-9-111S2.



National Semiconductor Americas Customer Support Center

Email: new.feedback@nsc.com Tel: 1-800-272-9959

www.national.com

National Semiconductor
Europe Customer Support Center
Fax: +49 (0) 180-530 85 86
Email: europe.support@nsc.com

Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 69 9508 6208
English Tel: +44 (0) 870 24 0 2171
Français Tel: +33 (0) 1 41 91 8790

National Semiconductor Asia Pacific Customer Support Center Email: ap.support@nsc.com National Semiconductor Japan Customer Support Center Fax: 81-3-5639-7507 Email: jpn.feedback@nsc.com Tel: 81-3-5639-7560 This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.